


Horizontal or Vertical Scale Unit

Lets you measure and position any assembly on fixtures, presetting devices for tooling or machines. Flexible mounting for use in any position.

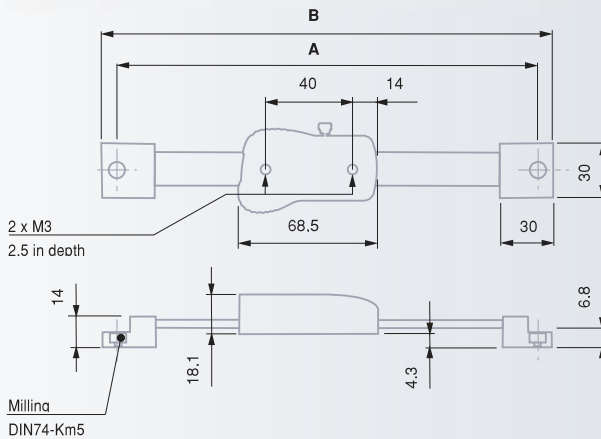

No	mm	in	A mm	B mm
00530271	0 ÷ 150	0 ÷ 6	265	278
00530273	0 ÷ 300	0 ÷ 12	415	428
00530274	0 ÷ 600	0 ÷ 24	725	738
00530275	0 ÷ 1000	0 ÷ 40	1135	1148

Optional Accessory

01961000	3V lithium batterv. 190 mAh. type CR 2032 For connecting cables. see section A			
----------	---	--	--	--

- ✓
- Factory standard
- See table
- 0.01 mm
0.0005 in
- LCD. 7 mm
- Floating zero
- Display lock
- mm / in conversion
- See page B-2
- Steel scale with incremental divisions, magnetic
- > 1.8 m / s
- RS232 opto-coupled, mono- and bi-directional
- Hardened stainless steel
- 3V lithium battery, CR 2032
- ≈ 1.5 a
(≈ 2000 h / a)
- Idle mode after 10 min., automatic switch off after 2 h.
- 10°C to 40°C
- 10°C to 60°C
- 100%
- IP67 (IEC 60529)
- EN 50081-1
EN 50082-1
- Suitable carrying case
- Identification number
- Inspection report with a declaration of conformity