


TESAMASTER Precision Micrometers with Digital Counter to 0.1 mm

Analogue indication of the full millimetres, hundredths and fractions of hundredth – Accurate, fast reading of the tenths of millimetres – Parallax-free reading of the thousandths of millimetres on vernier.

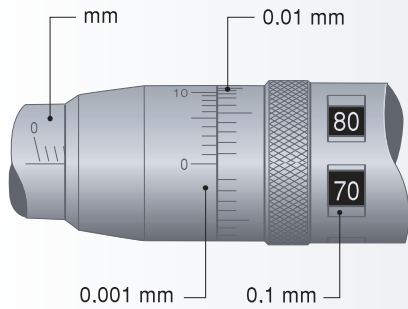

No	mm	µm	
		µm	µm
00310001	0 ÷ 25	2	1
00310002	25 ÷ 50	2	1.5
00310003	50 ÷ 75	3	1.5
00310004	75 ÷ 100	3	1.5
00310005	100 ÷ 125	4	2
00310006	125 ÷ 150	4	2.5
00310007	150 ÷ 175	5	3
00310008	175 ÷ 200	5	3
00310009	200 ÷ 225	6	3.5
00310010	225 ÷ 250	6	3.5

No	in	µm	
		µm	µm
00320001	0 ÷ 1	2	1

- ✓
- DIN 863 T1
NF E 11-095
- Vernier reading to 0.001 mm or 0.0001 in
- Scale division: 0.1 mm or 0.005 in
- Tungsten carbide tipped
- ≤ 100 mm: Ø 6.5 mm
> 100 mm: Ø 8 mm
- 0.5 mm
- Max. 10 N
- Plastic case
- Identification number
- Measuring range 0 to 100 mm with inspection report and declaration of conformity
- Measuring range smaller than 100 mm with a declaration of conformity

ETALON MICRORAPID 226 with 1 mm Revolution

High precision micrometers – Fast, accurate reading – No reading error of the half millimetres – Barrel with pitch to 1 mm – Thimble with 100 graduations – Vernier reading to 0.001 mm.



No	mm	µm	
		µm	µm
072116406	0 ÷ 25	2	1
072116407	25 ÷ 50	2	1.5
072116408	50 ÷ 75	3	1.5
072116409	75 ÷ 100	3	1.5

- ✓
- DIN 863 T1
NF E 11-095
- Parallax-free vernier reading to 0.001 mm
- Tungsten carbide tipped
- Ø 6.5 mm
- 1 mm
- Max. 10 N
- Plastic case
- Identification number
- Inspection report with a declaration of conformity



DIN 863 T1
NF E 11-095

0 to 100 mm
resp. 0 to 4 in
with vernier

Tungsten carbide
tipped

≤ 100 mm:
∅ 6.5 mm,
> 100 ≤ 200 mm:
∅ 8 mm

0.5 mm

Max. 10 N

Plastic case

Identification
number

Measuring
range
0 to 100 mm
with inspection report and
declaration of conformity

Measuring
range smaller
than 100 mm
with a declaration of
conformity

ETALON 260 Standard Models with Analogue Indication

The knurled sleeve only needs to be reversed to render the friction drive built into the thimble inactive.



No	mm	mm	µm	µm
071115887	0 ÷ 25	0.002	2	2
071115888	25 ÷ 50	0.002	2	2
071115889	50 ÷ 75	0.002	3	3
071115890	75 ÷ 100	0.002	3	3
071115891	100 ÷ 125	0.01	4	3
071115892	125 ÷ 150	0.01	4	3
071115893	150 ÷ 175	0.01	5	4
071115894	175 ÷ 200	0.01	5	4

No	in	in	µm	µm
071115899	0 ÷ 1	0.0001	2	2
071115900	1 ÷ 2	0.0001	2	2
071115901	2 ÷ 3	0.0001	3	3
071115902	3 ÷ 4	0.0001	3	3



DIN 863 T1
NF E 11-095

0.01 mm

Tungsten carbide
tipped

∅ 6.5 mm

0.5 mm

Max. 10 N

Plastic case

Identification
number

Inspection report
with a declaration of
conformity

ETALON Basic to 0.01 mm



No	mm
00119046	0 ÷ 25
00119047	25 ÷ 50
00119048	50 ÷ 75
00119049	75 ÷ 100

No	mm
00119050	0 ÷ 100

Set of 4 ETALON Basic to 0.01 mm

TESA ISOMASTER

Standard Models with Analogue Indication

Slanted full millimetres on the barrel are set apart from the straight half millimetres to virtually eliminate reading errors.

The knurled sleeve needs only be reversed to render the friction drive built into the thimble inactive.



No	mm	mm
00110101	0 ÷ 25	0,01
00110102	25 ÷ 50	0,01
00110103	50 ÷ 75	0,01
00110104	75 ÷ 100	0,01
00110105	100 ÷ 125	0,01
00110106	125 ÷ 150	0,01
00110107	150 ÷ 175	0,01
00110108	175 ÷ 200	0,01
00110109	200 ÷ 225	0,01
00110110	225 ÷ 250	0,01
00110111	250 ÷ 275	0,01
00110112	275 ÷ 300	0,01
	<i>in</i>	<i>in</i>
00120101	0 ÷ 1	0.0001

- ✓
- DIN 863 T1
NFE 11-095
- Tungsten carbide
tipped
- ≤ 100 mm:
Ø 6.5 mm
> 100 ≤ 300 mm:
Ø 8 mm
- 0.5 mm
- Max. 10 N
- Plastic case
- Identification
number
- Measuring
range
0 to 100 mm
with inspection report and
declaration of conformity
- Measuring
range smaller
than 100 mm
with a declaration of
conformity

Set of 4 TESA ISOMASTER

Same execution as above.


The models covering the application range 0 to 100 mm provide the quality that you need at competitive prices.



- ✓
- Plastic case
- No
- mm
0 ÷ 100

TESAMASTER Precision Micrometers with Digital Counter to 0.1 mm

Analogue indication of the full millimetres, hundredths and fractions of hundredth – Accurate, fast reading of the tenths of millimetres – Parallax-free reading of the thousandths of millimetres on vernier.

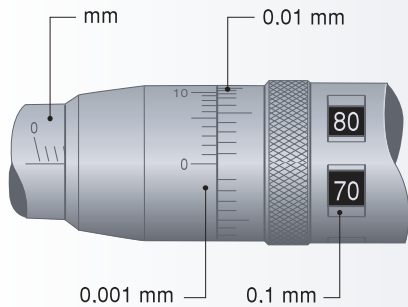

No	mm		
	mm	μm	μm
00310001	0 ÷ 25	2	1
00310002	25 ÷ 50	2	1.5
00310003	50 ÷ 75	3	1.5
00310004	75 ÷ 100	3	1.5
00310005	100 ÷ 125	4	2
00310006	125 ÷ 150	4	2.5
00310007	150 ÷ 175	5	3
00310008	175 ÷ 200	5	3
00310009	200 ÷ 225	6	3.5
00310010	225 ÷ 250	6	3.5

No	in		
	in	μm	μm
00320001	0 ÷ 1	2	1



DIN 863 T1
NF E 11-095

Vernier reading to 0.001 mm or 0.0001 in

Scale division: 0.1 mm or 0.005 in

Tunasten carbide tipped

≤ 100 mm: Ø 6.5 mm
> 100 mm: Ø 8 mm

0.5 mm

Max. 10 N

Plastic case

Identification number

Measuring range 0 to 100 mm with inspection report and declaration of conformity

Measuring range smaller than 100 mm with a declaration of conformity

ETALON MICRORAPID 226 with 1 mm Revolution

High precision micrometers – Fast, accurate reading – No reading error of the half millimetres – Barrel with pitch to 1 mm – Thimble with 100 graduations – Vernier reading to 0.001 mm.



No	mm		
	mm	μm	μm
072116406	0 ÷ 25	2	1
072116407	25 ÷ 50	2	1.5
072116408	50 ÷ 75	3	1.5
072116409	75 ÷ 100	3	1.5



DIN 863 T1
NF E 11-095

Parallax-free vernier reading to 0.001 mm

Tunasten carbide tipped

Ø 6.5 mm

1 mm

Max. 10 N

Plastic case

Identification number

Inspection report with a declaration of conformity



DIN 863 T1
NF E 11-095

0 to 100 mm
resp. 0 to 4 in
with vernier

Tungsten carbide
tipped

≤ 100 mm:
Ø 6.5 mm,
> 100 ≤ 200 mm:
Ø 8 mm

0.5 mm

Max. 10 N

Plastic case

Identification
number

Measuring
range
0 to 100 mm
with inspection report and
declaration of conformity

Measuring
range smaller
than 100 mm
with a declaration of
conformity

ETALON 260 Standard Models with Analogue Indication

The knurled sleeve only needs to be reversed to render the friction drive built into the thimble inactive.



No	mm	mm	µm	µm
071115887	0 ÷ 25	0.002	2	2
071115888	25 ÷ 50	0.002	2	2
071115889	50 ÷ 75	0.002	3	3
071115890	75 ÷ 100	0.002	3	3
071115891	100 ÷ 125	0.01	4	3
071115892	125 ÷ 150	0.01	4	3
071115893	150 ÷ 175	0.01	5	4
071115894	175 ÷ 200	0.01	5	4

No	in	in	µm	µm
071115899	0 ÷ 1	0.0001	2	2
071115900	1 ÷ 2	0.0001	2	2
071115901	2 ÷ 3	0.0001	3	3
071115902	3 ÷ 4	0.0001	3	3



DIN 863 T1
NF E 11-095

0.01 mm

Tungsten carbide
tipped

Ø 6.5 mm

0.5 mm

Max. 10 N

Plastic case

Identification
number

Inspection report
with a declaration of
conformity

ETALON Basic to 0.01 mm



No	mm
00119046	0 ÷ 25
00119047	25 ÷ 50
00119048	50 ÷ 75
00119049	75 ÷ 100

No	mm
00119050	0 ÷ 100

Set of 4 ETALON Basic to 0.01 mm

TESA ISOMASTER Standard Models with Analogue Indication

Slanted full millimetres on the barrel are set apart from the straight half millimetres to virtually eliminate reading errors.

The knurled sleeve needs only be reversed to render the friction drive built into the thimble inactive.



No	mm	mm
00110101	0 ÷ 25	0,01
00110102	25 ÷ 50	0,01
00110103	50 ÷ 75	0,01
00110104	75 ÷ 100	0,01
00110105	100 ÷ 125	0,01
00110106	125 ÷ 150	0,01
00110107	150 ÷ 175	0,01
00110108	175 ÷ 200	0,01
00110109	200 ÷ 225	0,01
00110110	225 ÷ 250	0,01
00110111	250 ÷ 275	0,01
00110112	275 ÷ 300	0,01
	<i>in</i>	<i>in</i>
00120101	0 ÷ 1	0.0001



DIN 863 T1
NF E 11-095

Tungsten carbide
tipped

≤ 100 mm:
∅ 6.5 mm
> 100 ≤ 300 mm:
∅ 8 mm

0.5 mm

Max. 10 N

Plastic case

Identification
number

Measuring
range
0 to 100 mm
with inspection report and
declaration of conformity

Measuring
range smaller
than 100 mm
with a declaration of
conformity

Set of 4 TESA ISOMASTER

Same execution as above.

The models covering the application range 0 to 100 mm provide the quality that you need at competitive prices.



Plastic case

No



00110113

mm
0 ÷ 100