


Micrometer Heads

Components commonly used for checking the various displacements on measuring fixtures, coordinate tables, microscopes, machines as well as other special appliances. Mounted on the cylindrical coupling shaft.

Models MICROMASTER


Without spindle lock.

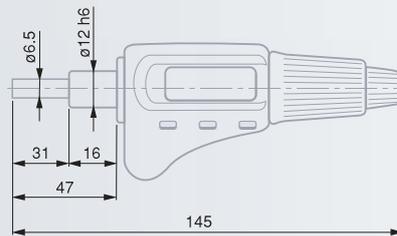

No		
06030038	0 ÷ 30	12h6
06030039	30 ÷ 0	12h6
06030040	30 ÷ 0	12h6

Model ISOMASTER AR

Without spindle lock.

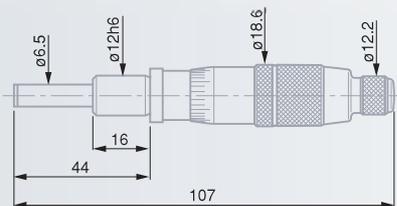


No		
00211201	0 ÷ 25	12h6



Model TESAMASTER AR

Without spindle lock.

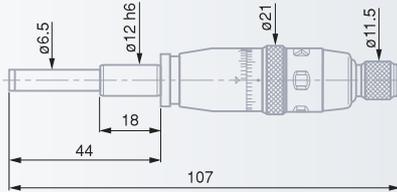


00312301	mm 0 ÷ 25	mm 12h6

- ✓
- DIN 863 T2 (Styl E)
- Vernier reading to 0.001 mm
- Scale division to 0.1 mm
- Tungsten carbide tipped
- 6.5 mm dia
- 0.5 mm
- Max. perm. error of 2 μ m
- Max. 10 N
- Identification number
- Declaration of conformity

ETALON 266 Micrometer Heads

With or without spindle lock.

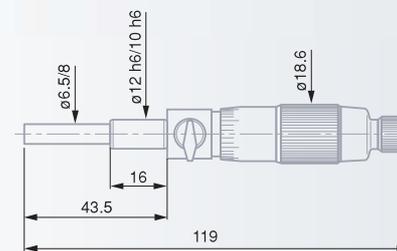

	mm	D mm	mm	Spindle lock
072115942	0 ÷ 25	ϕ 6.5	12h6	—
072115943	0 ÷ 25	ϕ 8	12h6	●
072116258	0 ÷ 25	ϕ 6.5	10h6	●

- ✓
- DIN 863 T2 (Styl E)
NF E 11-090
- Vernier reading to 0.002 mm
- Tungsten carbide tipped
- 0.5 mm
- Max. perm. error of 3 μ m
- Identification number
- Declaration of conformity